

SERIE T29XE

BOMBAS MULTIETAPAS VERTICALES

ALTAMIRA Serie T29X

29 lps / 1,740 lpm / 459 gpm

Rango: 15 a 40 lps


CÓDIGO	HP	kW	MÁXIMA EFICIENCIA		AMPERAJE A PLENA CARGA (AMP.)		PRESIÓN AL CIERRE (m/psi)	TX					TXE/TXN					PESO NETO (kg) DE BOMBA + MOTOR	
			CARGA (m)	GASTO (lps/gpm)	3 x 220V	3 x 440V		BRIDA DIN					BRIDA DIN		D1	D2	D3	TX	TXE / TXN
								H1	H2	D1	D2	D3	H1	H2				BRIDA DIN	BRIDA DIN
T29 X150-1-1	15	11	22	29 / 459	41	19.4	37/52	682	1127	268	215	350	686	1131	268	215	350	169	159
T29 X200-1	20	15	29		52.8	28.9	51/72	682	1171	268	215	350	686	1175	268	215	350	179	169
T29 X250-2-2	25	18.5	44		60.4	30.1	69/97	774	1309	317	242	350	778	1313	317	242	350	209	199
T29 X300-2-1	30	22	53		80.9	40.3	85/120	774	1353	317	242	350	778	1357	317	242	350	252	242
T29 X400-2	40	30	64		97.8	48.5	100/142	774	1397	317	290	400	778	1401	317	290	400	317	307
T29 X500-3-2	50	37	78		118	59	117/166	866	1591	398	365	400	870	1595	398	365	400	335	325
T29 X500-3-1			87				134/190	866	1591	398	365	400	870	1595	398	365	400		
T29 X600-3	60	45	98		143.5	71.5	151/214	866	1591	398	365	450	870	1595	398	365	450	393	383
T29 X600-4-2			113				167/237	958	1683	398	365	450	962	1687	398	365	450	400	

Nota: Las bombas ALTAMIRA serie TX están disponibles sobre pedido en versión TXE (acero inoxidable 304).



DIMENSIONES

TX


TX / TXE (304 SS) / TXN (316 SS)

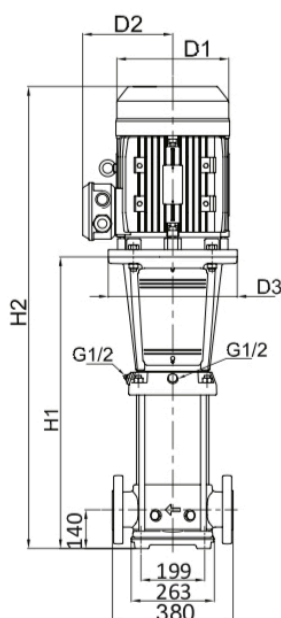

PN 25-40 / DN 100

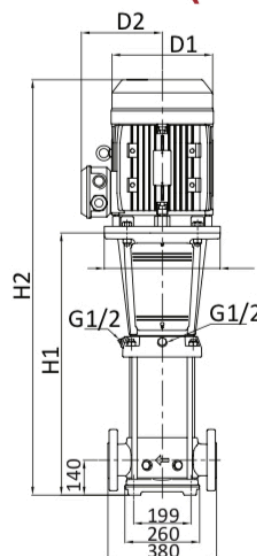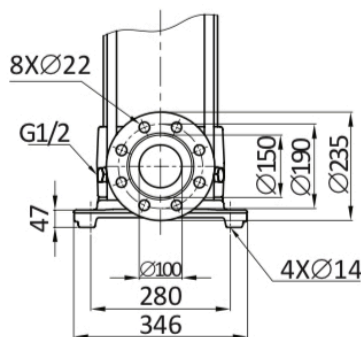

PN 16 / DN 100



- Todas las medidas son en mm.

DIÁMETRO DE CONEXIÓN	CONTRABRIDA DE BOMBA	SUCCIÓN	DESCARGA
		4"	4"

