

SERIE T6XE

BOMBAS MULTIETAPAS VERTICALES

ALTAMIRA Serie T6X

6 lps / 360 lpm / 95.1 gpm


Rango: 3 a 7 lps

CÓDIGO	HP	kW	MÁXIMA EFICIENCIA		AMPERAJE A PLENA CARGA (AMP.)		PRESIÓN AL CIERRE (m/psi)	TX					TXE / TXN							PESO NETO (kg) DE BOMBA + MOTOR		
			CARGA (m)	GASTO (lps/gpm)	3 x 220V	3 x 440V		BRIDA DIN					VITÁULICA		BRIDA DIN		D1	D2	D3	TX	TXE / TXN	
								H1	H2	D1	D2	D3	H1	H2	H1	H2				BRIDA DIN	BRIDA DIN	VITÁULICA
T6 X20-1	2	1.5	11	6 / 95.1	5.9	3.5	19/26	415	690	175	140		403	678	413	688	175	140		53	45	41.5
T6 X40-2	4	3.0	29		11.4	6.1	39/55	450	770	196	148		408	728	418	738	196	148		64	55	50.1
T6 X55-3	5.5	4.0	44		14.2	7.5	61/86	465	800	219	162		453	788	463	798	219	162		68	60	58.5
T6 X75-4	7.5	5.5	60		18.5	9.1	80/113	542	902	234	199	300	530	890	540	900	234	199	300	96	89	84.8
T6 X100-5	10	7.5	76		24.7	12.5	101/143	587	987	234	199	300	575	975	585	985	234	199	300	106	99	95.2
T6 X150-6			93		41	19.4	121/171	709	1154	268	215	350	697	1142	707	1152	268	215	350	144	138	127
T6 X150-7	15	11	108				140 /198	754	1199	268	215	350	742	1187	752	1197	268	215	350	146	139	129
T6 X150-8			122				160/227	799	1244	268	215	350	787	1232	797	1242	268	215	350	147	140	130
T6 X200-9	20	15	140	52.8	28.9	181/257	844	1333	268	215	350	832	1321	842	1331	268	215	350	159	152	142	
T6 X200-10			156			201 /285	889	1378	268	215	350	877	1366	887	1376	268	215	350	160	153	144	
T6 X250-12	25	18.5	189			60.4	30.1	242/343	979	1514	317	242	350	967	1502	977	1512	317	242	350	188	181


Nota: Las bombas ALTAMIRA serie TX están disponibles sobre pedido en versión TXE (acero inoxidable 304).

DIMENSIONES

TX

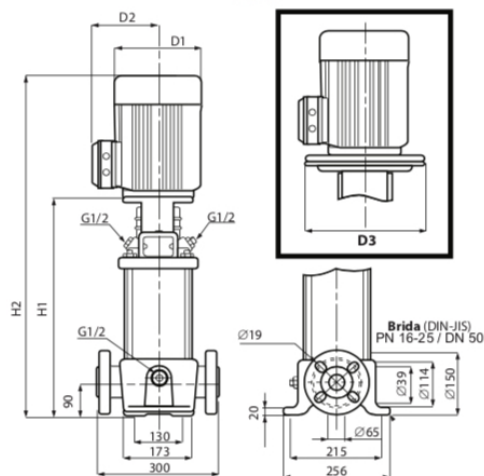

TXE (304 SS) / TXN (316 SS)

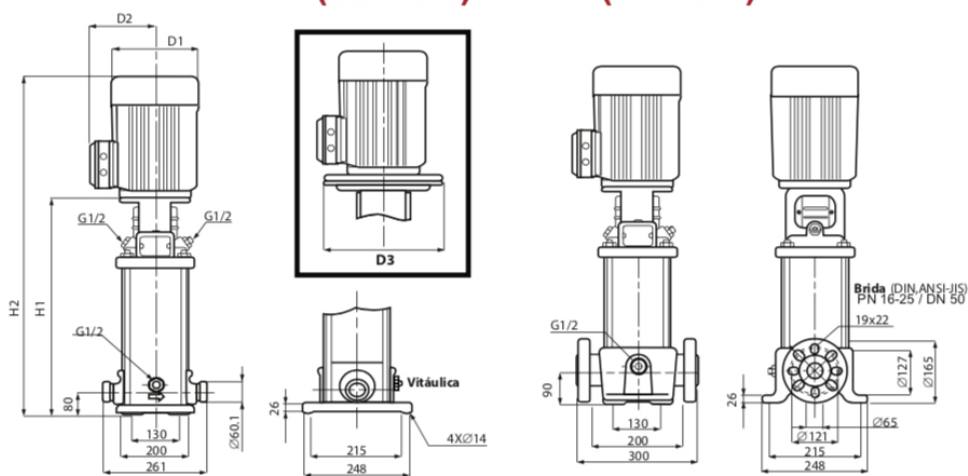

- Todas las medidas son en mm.

DIÁMETRO DE CONEXIÓN	CONTRABRIDA DE BOMBA	SUCCIÓN	DESCARGA
		2"	2"

