

SERIE T7.5XE

BOMBAS MULTIETAPAS VERTICALES

ALTAMIRA Serie T7.5X

7.5 lps / 450 lpm / 118.8 gpm


Rango: 3 a 9 lps

CÓDIGO	HP	kW	MÁXIMA EFICIENCIA		AMPERAJE A PLENA CARGA (AMP.)		PRESIÓN AL CIERRE (m/psi)	TX					TXE / TXN							PESO NETO (kg) DE BOMBA + MOTOR			
			CARGA (m)	GASTO (lps/gpm)	3 x 220V	3 x 440V		BRIDA DIN					VITÁULICA		BRIDA DIN		D1	D2	D3	TX		TXE / TXN	
								H1	H2	D1	D2	D3	H1	H2	H1	H2				BRIDA DIN	BRIDA DIN	VITÁULICA	
T7.5 X30-1	3	2.2	12	7.5/118.8	8.6	4.6	19/26	415	690	175	140		405	680	415	690	175	140		55	48	43.5	
T7.5 X55-2	5.5	4.0	29		14.2	7.5	41/58	420	755	219	162		410	745	420	755	219	162		67	62	57.1	
T7.5 X75-3	7.5	5.5	46		18.5	9.1	61/86	497	857	234	199	300	487	847	497	857	234	199	300	95	88	83.4	
T7.5 X100-4	10	7.5	61		24.7	12.5	78/110	542	942	234	199	300	532	932	542	942	234	199	300	105	98	93.8	
T7.5 X150-5	15	11	79	7.5/118.8	41	19.4	104/147	664	1109	268	215	350	654	1099	664	1109	268	215	350	143	136	126	
T7.5 X150-6			96				125/177	709	1154	268	215	350	699	1144	709	1154	268	215	350	144	138	127	
T7.5 X200-7	20	15	112		52.8	28.9	147/208	754	1243	268	215	350	744	1233	754	1243	268	215	350	156	149	140	
T7.5 X200-8			129				167/237	799	1288	268	215	350	789	1278	799	1288	268	215	350	157	150	141	
T7.5 X250-10	25	18.5	163			60.4	30.1	211/299	889	1424	317	242	350	879	1414	889	1424	317	242	350	185	178	179


Nota: Las bombas ALTAMIRA serie TX están disponibles sobre pedido en versión TXE (acero inoxidable 304).

DIMENSIONES

TX

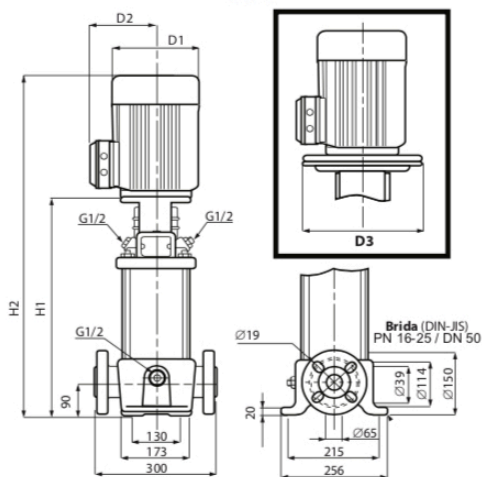

TXE (304 SS) / TXN (316 SS)

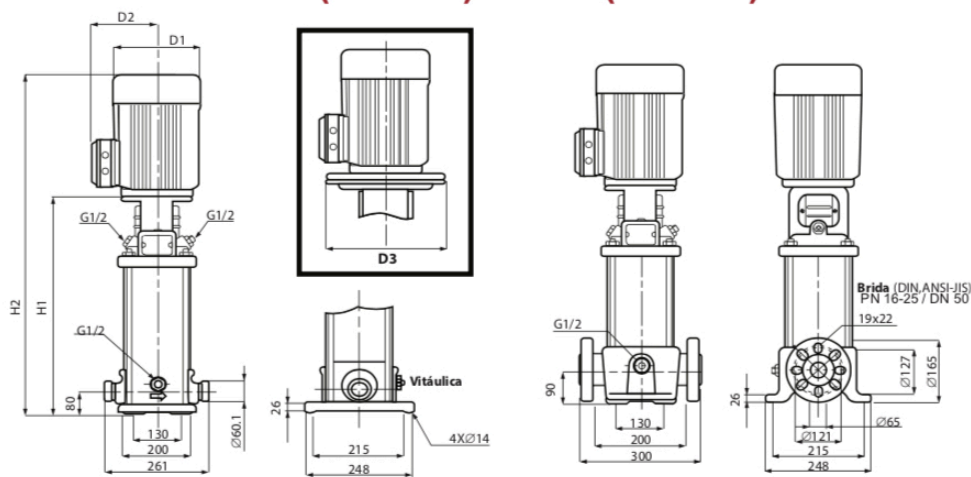

- Todas las medidas son en mm.

DIÁMETRO DE CONEXIÓN	CONTRABRIDA DE BOMBA	SUCCIÓN	DESCARGA
		2"	2"

