



SERIE FLUX 44 (para 44 pls)
CURVAS DE OPERACIÓN



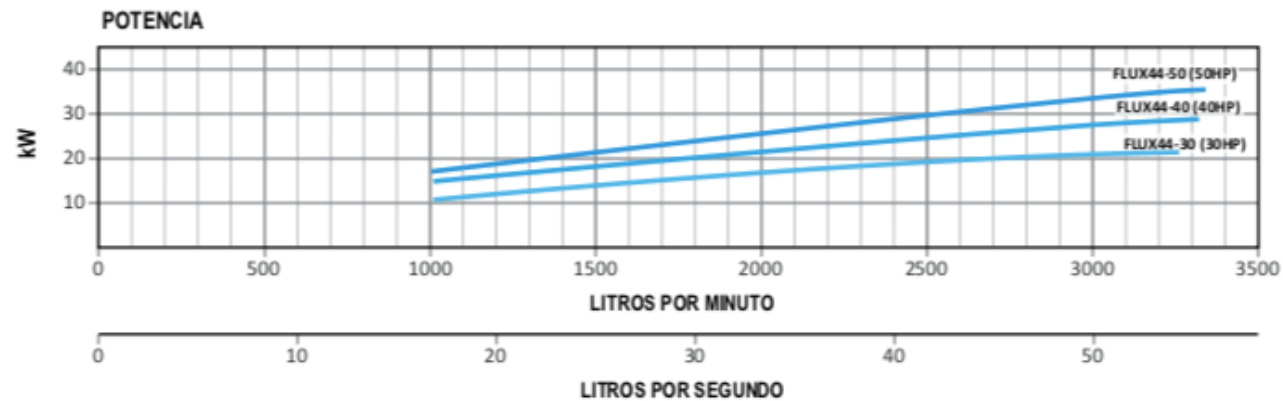


TABLA DE ESPECIFICACIONES

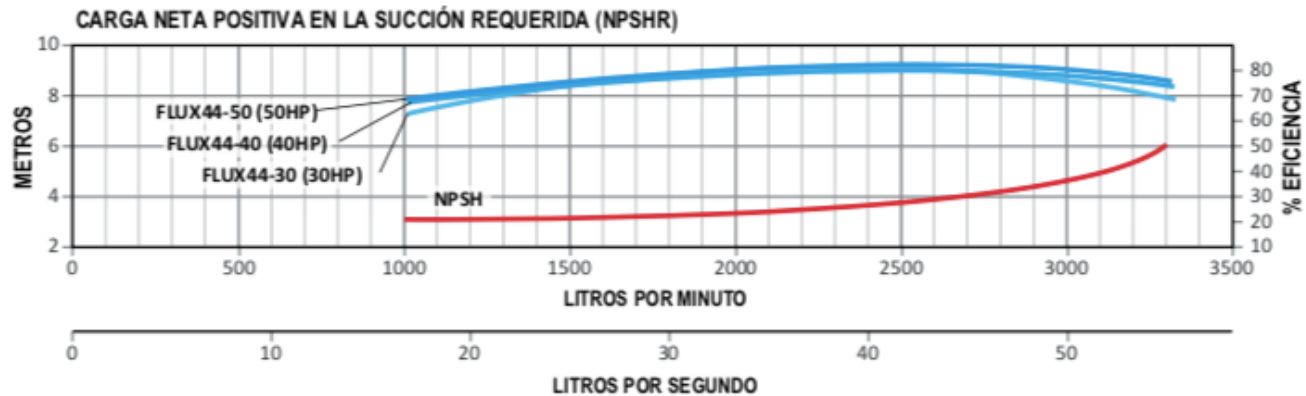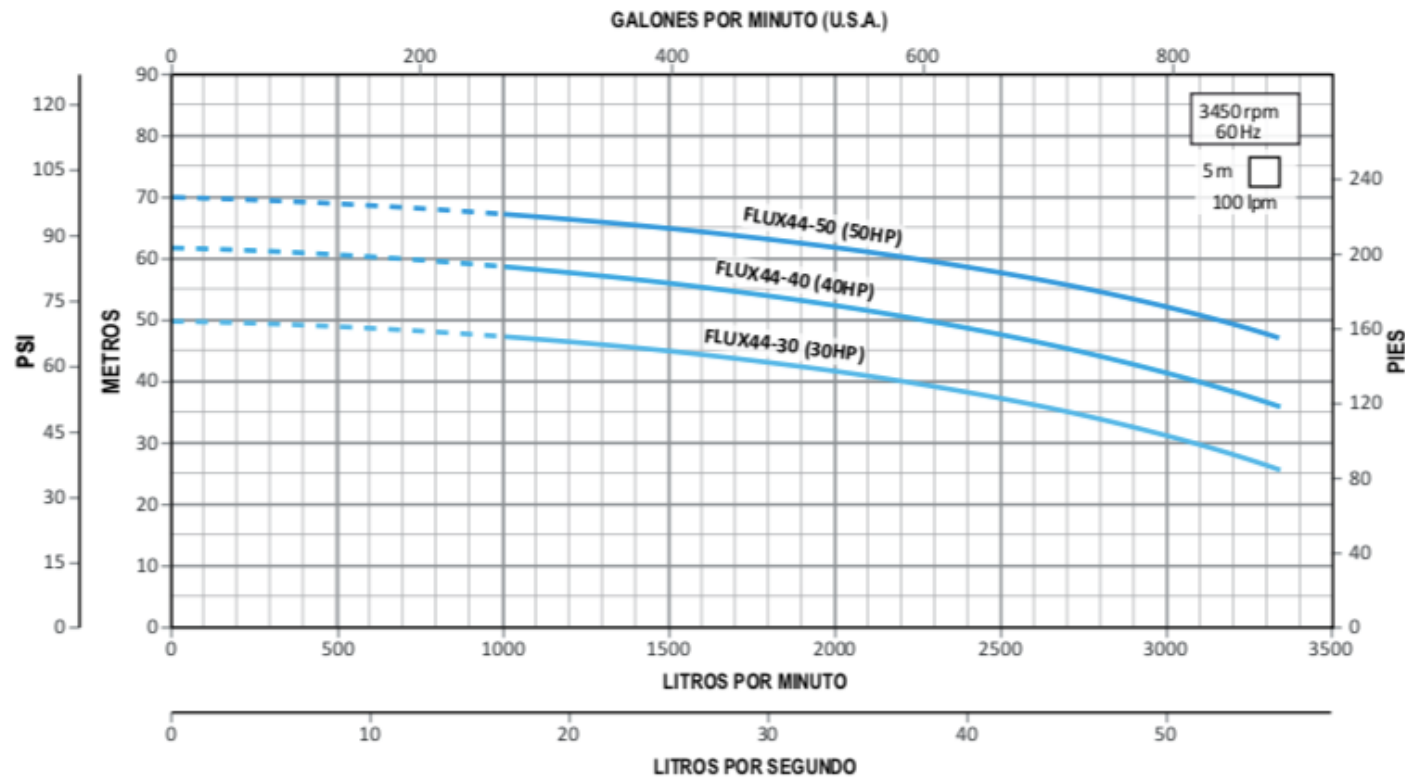

Código	HP	KW	Fases x Volts	A	Succión x descarga	DMS*	Presión al cierre (m/psi)	Carga en metros (psi)			
								30 (42.6)	40 (56.8)	50 (71)	60 (85.2)
								Gasto (litros por minuto)			
FLUX44-303234	30	22	3 x 230/460	70/35	4" x 3"	5"	50/71	3083	2250		
FLUX44-403234	40	30		93/46.5			61/86.6		3100	2283	666
FLUX44-503234	50	37		114/57			70/99.4			3166	2250


***DMS: Diámetro mínimo recomendado para tubería de succión.**

KIT DE CONTRABRIDAS (venta por separado)



Código	Conexiones		Tipo de conexión	Material de construcción	Incluye	Peso (Kg)
	Succión	Descarga				
FLUXKB-DN4X3	4"	3"	Rosca NPT Hembra	Acero inoxidable 304	Contrabridas, empaques, tornillos y tuercas	5.4

DIMENSIONES Y PESOS

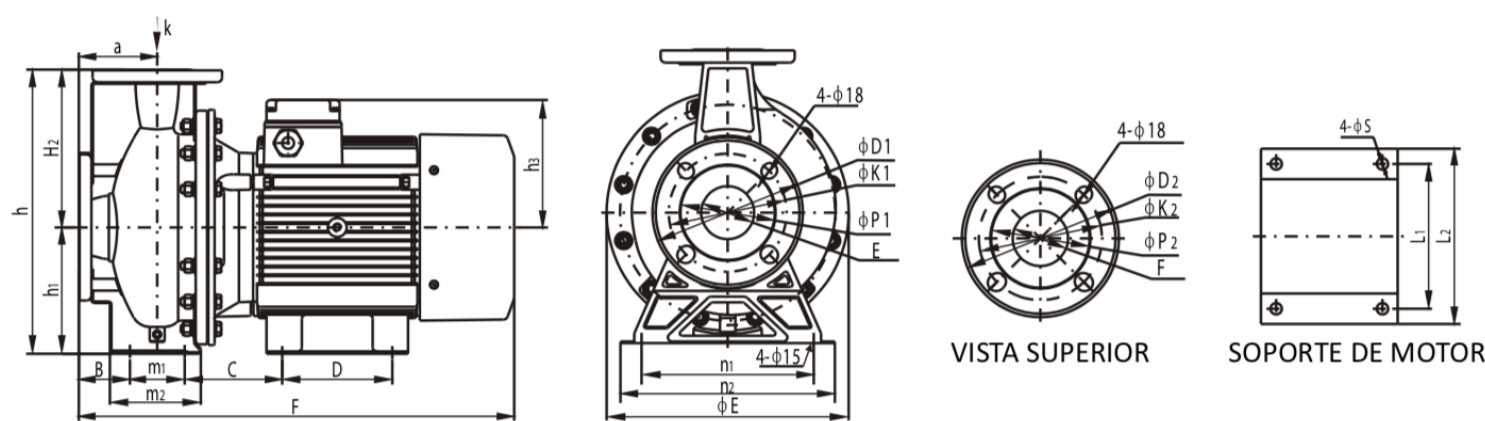

Código	Dimensiones																								Peso (kg)	
	(mm)																						(Pulgadas)			
	ϕ E	F	h	h1	h2	h3	a	m1	m2	n1	n2	B	C	D	ϕS	L1	L2	ϕD1	ϕk1	ϕP1	ϕD2	ϕK2	ϕP2	E		F
FLUX44-30	300	811	430	180	250	275	125	95	176	280	320	78	180	241	15	279	355	220	180	152	200	160	132	4"	3"	212
FLUX44-40		880	450	200		308							188	305	18.5	318	386									282
FLUX44-50																										



ALTAMIRA FLUX44
 IMAGEN ILUSTRATIVA