


JM100 Motor uso bomba

Armazón 140 – 320

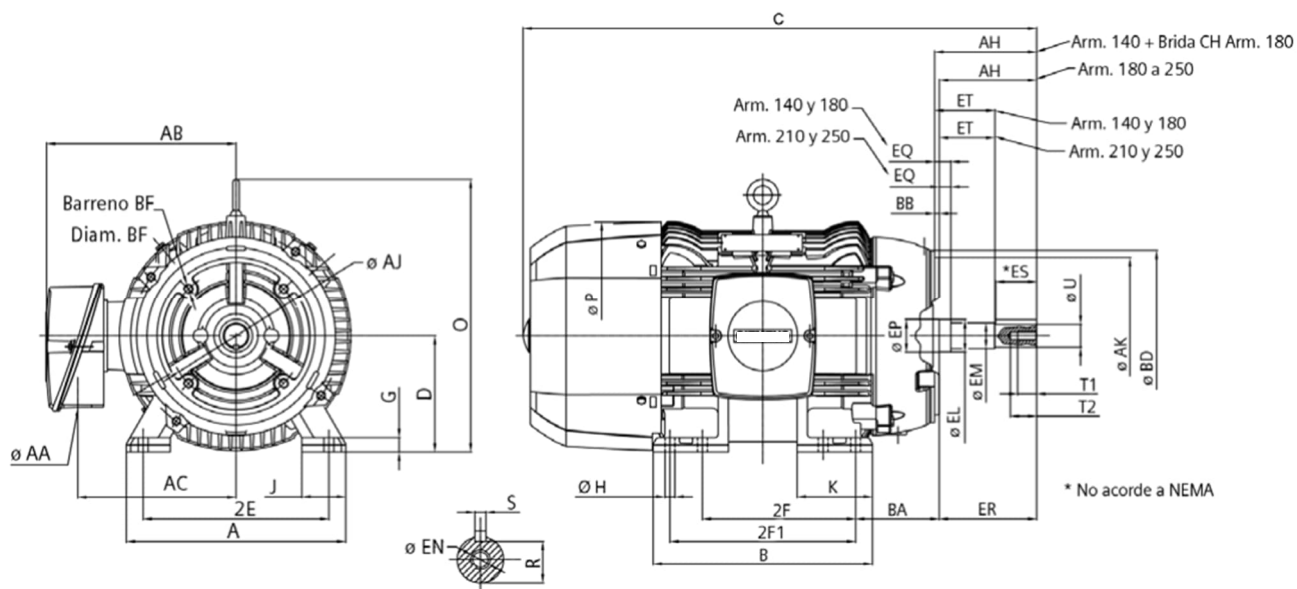

Armazón	øU	AH	øAJ	ø AK	BB	EQ	ø BD	3/8-16NC	BF #
143JM	0.875	4.26	5.875	4.5	0.16	0.625	6.6	3/8-16NC	4
145JM	0.875	4.26	5.875	4.5	0.16	0.625	6.6	1/2-12NC	4
182JM	0.875	4.26	7.25	8.5	0.25	0.625	8.9	1/2-13NC	4
184JM	0.875	4.26	7.25	8.5	0.25	0.625	8.9	3/8-16NC	4
182JM CH	0.875	4.26	5.875	4.5	0.16	0.625	6.5	3/8-16NC	4
184JM CH	0.875	4.26	5.875	4.5	0.16	0.625	6.5	1/2-13NC	4
213JM	0.875	4.26	7.25	8.5	0.25	0.625	8.9	1/2-13NC	4
215JM	0.875	4.26	7.25	8.5	0.25	0.625	8.9	1/2-13NC	4
254JM	1.25	5.25	7.25	8.5	0.25	0.625	9.27	1/2-13NC	4
256JM	1.25	5.25	7.25	8.5	0.25	0.625	9.27	5/8"-11NC	4
284JM	1.25	5.25	11	12.5	0.25	0.625	14	5/8"-11NC	4
286JM	1.25	5.25	11	12.5	0.25	0.625	14	5/8"-11NC	4
324JM	1.25	5.25	11	12.5	0.25	0.625	14	5/8"-11NC	4
326JM	1.25	5.25	11	12.5	0.25	0.625	14	5/8"-11NC	4

Armazón	ø EL	ø EM	R	ø EP	ER	ET	S	EN	ES
143JM	1.1576	1	0.771	1 11/64"	4.25	2.875	0.188	3/8-16NC	1,375
145JM	1.1576	1	0.771	1 11/64"	4.25	2.875	0.188	3/8-16NC	1,375
182JM	1.25	1	0.771	1 3/8"	4.25	2.875	0.188	3/8-16NC	1,375
184JM	1.25	1	0.771	1 3/8"	4.25	2.875	0.188	3/8-16NC	1,375
182JM CH	1.25	1	0.771	1 3/8"	4.25	2.875	0.188	3/8-16NC	1,375
184JM CH	1.25	1	0.771	1 3/8"	4.25	2.875	0.188	3/8-16NC	1,375
213JM	1.25	1	0.771	1 49/64"	4.25	2.875	0.188	3/8-16NC	1,375
215JM	1.25	1	0.771	1 49/64"	4.25	2.875	0.188	3/8-16NC	1,375
254JM	1.752	1.375	1.112	1 49/64"	5.25	3	0.25	1/2-13NC	2.25
256JM	1.752	1.375	1.112	1 49/64"	5.25	3	0.25	1/2-13NC	2.25
284JM	1.75	1.375	1.112	1.97	5.25	3	0.25	1/2"-13NC	2.09
286JM	1.75	1.375	1.112	1.97	5.25	3	0.25	1/2"-13NC	2.09
324JM	1.75	1.375	1.112	1.97	5.25	3	0.25	1/2"-13NC	2.09
326JM	1.75	1.375	1.112	1.97	5.25	3	0.25	1/2"-13NC	2.09

Dimensiones en pulgadas; Dimensiones típicas, no garantizadas