

SERIE T1XE

BOMBAS MULTIETAPAS VERTICALES

ALTAMIRA Serie T1 X

1 lps / 60 lpm / 15.8 gpm

Rango: 0.4 a 1.5 lps




CÓDIGO	HP	KW	MÁXIMA EFICIENCIA		AMPERAJE A PLENA CARGA (AMP.)		PRESIÓN AL CIERRE (m/psi)	TX				TXE / TXN						PESO NETO (kg) DE BOMBA + MOTOR		
			CARGA (m)	GASTO (lps/gpm)	3 x 220V	3 x 440V		BRIDA DIN				VITÁULICA		BRIDA DIN		D1	D2	TX	TXE / TXN	
								H1	H2	D1	D2	H1	H2	H1	H2				BRIDA DIN	BRIDA DIN
T1 X05-2	1/2	0.37	12	1 / 15.8	1.7	1	18/25	279	470	141	109	257	448	282	473	141	109	23	20	16
T1 X07-3	3/4	0.55	19		2.4	1.4	26/36	279	470	141	109	257	448	282	473	141	109	24	21	17
T1 X07-4			26				35/49	297	488	141	109	275	466	300	491	141	109		22	17
T1 X10-5	1	0.75	33		3.1	1.8	46/65	321	552	141	109	299	530	324	555	141	109	27	24	20
T1 X15-6	1.5	1.1	41		4.5	2.4	54/76	339	570	141	109	317	548	342	573	141	109	29	25	23
T1 X15-7			47				64/90	357	588	141	109	335	566	360	591	141	109			23
T1 X15-8			53				73/103	375	606	141	109	353	584	378	609	141	109		26	24
T1 X20-9	2	1.5	62		5.9	3.5	83/117	409	684	175	140	387	662	412	687	175	140	38	35	31.2
T1 X20-10			71				93/132	427	702	175	140	405	680	430	705	175	140	39		31.6
T1 X20-11			76				103/146	445	720	175	140	423	698	448	723	175	140		36	31.9
T1 X30-12	3	2.2	82		8.6	4.6	112/159	463	738	175	140	441	716	466	741	175	140	42	39	34.3
T1 X30-13			91				122/173	517	792	175	140	459	734	484	759	175	140	43		34.7
T1 X30-15			105				140/198	553	828	175	140	495	770	520	795	175	140		44	40
T1 X30-17			118				160/227	593	868	175	140	531	806	556	831	175	140	41		36.5
T1 X40-19	4	3.0	135		11.4	6.1	180/255	629	949	196	148	572	892	597	917	196	148	52	49	43.3
T1 X40-21			148				199/282	665	985	196	148	608	928	633	953	196	148	53		44
T1 X40-23			161				218/309	665	985	196	148	644	964	669	989	196	148	54	50	44.8
T1 X55-25	5.5	4.0	179		14.2	7.5	238/337	701	1036	219	162	680	1015	705	1040	219	162	57	54	52.5

Nota: Las bombas ALTAMIRA serie TX están disponibles sobre pedido en versión TXE (acero inoxidable 304).

DIMENSIONES

TX

TXE (304 SS) / TXN (316 SS)

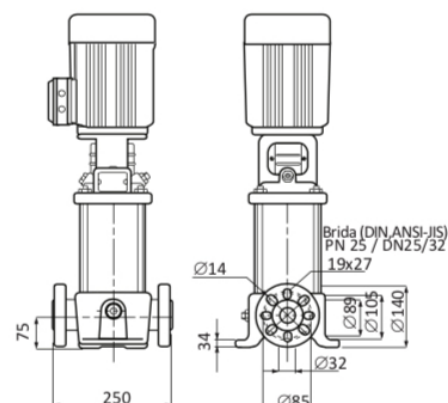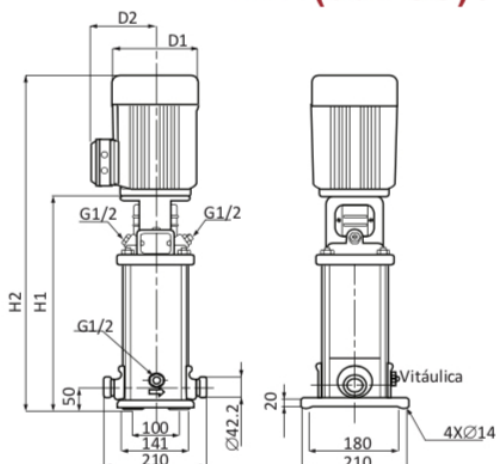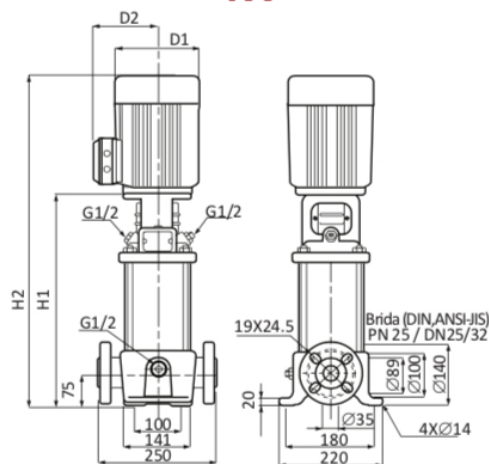

- Todas las medidas son en mm.

DIÁMETRO DE CONEXIÓN	CONTRABRIDA DE BOMBA	SUCCIÓN	DESCARGA
		1.25"	1.25"

